




12V LED STRIP LIGHT INSTRUCTIONS

CUTTING INTERVALS:

The length of your 12V LED strip light is customizable and may be cut to size in specific intervals only.



Can't find the mark? For more info on cutting intervals please contact your supplier.

 Never attempt to cut or install other accessories while 12V LED strip lights are plugged in to a power source.

1 Using the cutting interval length, measure from the power cord connection or the end of your strip light and you will find copper pads (with or without a dotted cut line) that indicates where it is safe to make your cut.

2 Use scissors or a knife to make a perpendicular cut in the center of the copper pads or along the cut mark (if applicable).

 **WARNING:** When using strip lighting outdoors, waterproof PVC or silicone is required to seal all connections, power cords, and end caps. **NOTE** the use of any non-recommended sealant e.g. electrical tape, may result in a strip light or strip light accessory failure and will void the warranty.

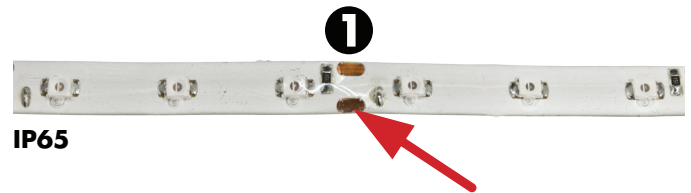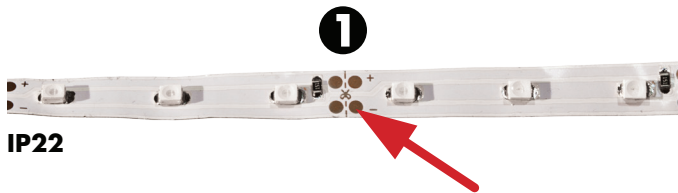

WARNING: 12V LED STRIP LIGHTS PRODUCE EXCESSIVE HEAT OPERATING WHILE SPOOLED. FULLY UNSPOOL LED LIGHTS BEFORE OPERATION. FAILURE TO DO SO MAY RESULT IN DAMAGE TO THE STRIP LIGHT AND OR PROPERTY.




NOTE: LED STRIP LIGHTS ARE POLARIZED. IF THEY DO NOT LIGHT UP WHEN YOU FIRST PLUG THEM IN OR TRY TO MAKE A CONNECTION ATTACH THE POWER CONNECTOR OR ACCESSORY ON THE OPPOSITE END OF THE STRIP LIGHT.

USING IP22 SNAP CONNECTOR:

- ① Cut strip light at the cut mark using the "Cutting Interval" instructions on pg. 1
- ② Peel back the adhesive tape backing enough to accommodate the connector.
- ③ Insert strip light under the two tabs so that they make contact with the copper pads.
- ④ Close the connector ensuring that it is snapped closed and the strip light is secure.
- ⑤ Apply shrink tubing to all connections (optional).

Opening IP22 Snap Connector: gently pull snap side opening outwards over the ridge to open. To close apply pressure to top of connector on the opening side until the opening tab snaps in place.

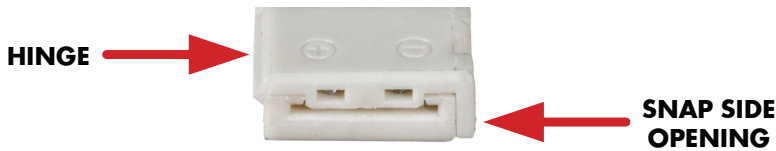

USING IP65 VAMPIRE CONNECTOR:



- ① Cut strip light at the cut mark using the "Cutting Interval" instructions on pg. 1
- ② Peel back the adhesive tape backing enough to accommodate the connector.
- ③ Insert strip light into the connector so that the connector teeth will insert into the bottom of the strip light.
- ④ Close the connector ensuring that it is snapped closed and the strip light is secure.
- ⑤ Apply shrink tubing to all connections (optional).

Opening IP65 Vampire Connector: gently pull snap side opening outwards over the ridge to open. To close apply pressure to top of connector on the opening side until the opening tab snaps in place.



USING A SOLDERLESS CONNECTOR:

- ① Cut strip light and expose copper pads. (In some cases the outer plastic casing will need to be removed.)
- ② Extend black clips on both sides of solderless splice.
- ③ Insert exposed strip light tape into splice and close black clips.
- ④ Apply shrink tubing to all connections.
- ⑤ Attach an end cap to end of the strip light run. (If not previously installed)



WARNING: When using strip lighting outdoors, waterproof PVC or silicone is required to seal all connections, power cords, and end caps. NOTE the use of any non-recommended sealant e.g. electrical tape, may result in a strip light or strip light accessory failure and will void the warranty.