

LED WALL PACK LIGHT - WPC SERIES

Introduction

- ◆ The WPC series is available in selectable wattage options that produce a range from 4,050 to 14,580 lumens with a wide and even distribution. Since WPC occupies the same area as a typical metal halide glass wall pack, it can completely cover unsightly stains.
- ◆ The WPC offers two kinds of lenses, a high-quality borate glass lens and a polycarbonate lens, which work with a high-efficiency driver to provide superior illumination.
- ◆ Available with Emergency battery backup, and Photocell.

Features

Construction:

- ◆ Made with a rugged die-cast aluminum housing with bronze powder coating for durability. Castings are sealed with gaskets to prevent the ingress of external contaminants such as water. It has 4-6KV surge protection.

Optics:


- ◆ These wall packs utilize high efficiency LEDs providing maximum brightness with minimal cost. Color temperature (CCT) options to select from with our tunable CCT models are 3000K/4000K/5000K, with a minimum CRI of 70. Borate glass lens and a polycarbonate lens are available options.

Electrical:


- ◆ The Input voltage is AC120-277V/AC120-347v (50/60Hz). Electronic drivers ensure system power factor >90%. 0-10V dimming driver is standard.

Finish:

- ◆ Standard color is dark bronze.

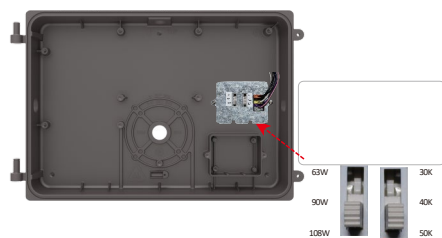

Wattage & CCT Selectable - Dial in the desired lumens and CCT via the dial located in the fixture.

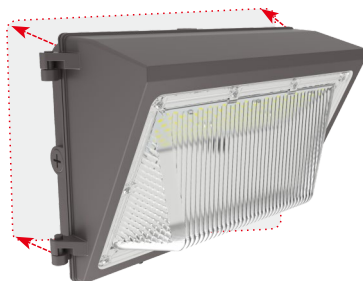

The geometry covers the footprint of a typical HID wall pack, covering any unsightly stains.



Glass lens



PC lens

Warranty:

- ◆ Standard 5 years warranty

Product Selectable:

30W	45W	63W
-----	-----	-----

WATTAGE SELECTABLE

3000K	4000K	5000K
-------	-------	-------

CCT SELECTABLE

63W	90W	108W
-----	-----	------

WATTAGE SELECTABLE

Compliances:

- ◆ UL listed for wet locations, max ambient temperature rating 113°F
- ◆ DLC® (DesignLights Consortium) Qualified.



Emergency test button and indicator




Parameters



Model #	Wattage	Lumen Output	Input Voltage	CCT
SWPX30VW-VK (30/45/63)W-(30/40/50K)	(30/45/63)W	Max. 8,505lm	AC120-277/347	30/40/50K Tunable
SWPX63VW-VK (63/90/108)W-(30/40/50K)	(63/90/108)W	Max. 14,580lm	AC120-277/347	

Dimension


unit: inch/mm

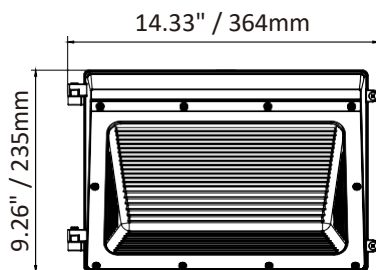


Glass lens

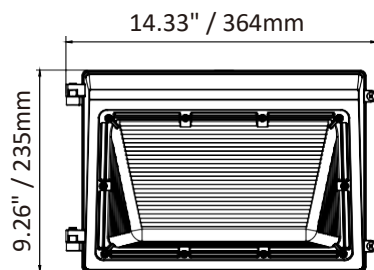

PC lens



Photometrics

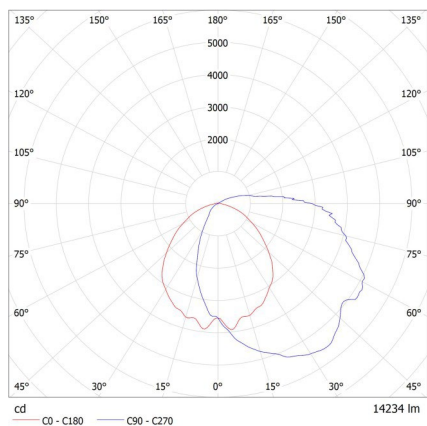

Accessories



Photocell



8W Emergency battery backup
(apply to 30-108W WPC wall pack light)

Electrical data

Voltage (V)	WPC(30/45/63)W	WPC(63/90/108)W
	Max Current (A)	Max Current (A)
120V	0.53	0.90
208V	0.30	0.52
240V	0.26	0.45
277V	0.23	0.39
347V	0.18	0.31